
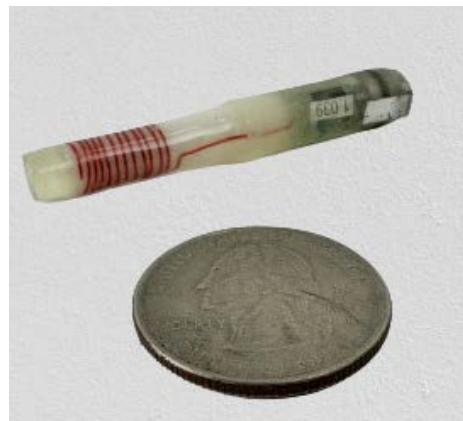


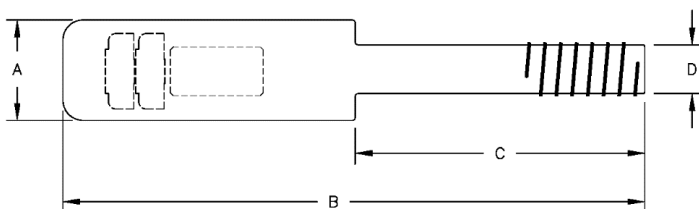

Transmitter type:
Calibration tolerance:
Frequency stability:
Pulse Rate and width:
Pulse rate variation:
Battery:
Activation:
Encapsulation:

Technical Specifications

Crystal controlled 2-stage
 $\pm 2.5\text{kHz}$
 $\pm 2.5\text{kHz}$, -20°C to 40°C
Typical on time 20ms, off time 1100ms (controlled by astable circuit)
5%/volt, $\pm 20\%$ for temperatures -20°C to $+40^{\circ}\text{C}$
Silver Oxide
By removing magnet
Electrical resin, water-proof, specific gravity: 1.12

SPECIFICATIONS										
Model	Battery	Battery Capacity (days)			Dimensions (mm)				Weight (grams)	Price
	3V	30 ppm*	40 ppm	55 ppm	A	B	C	D		
F1020D	(2) 377	22	16	12	9	52	26	5	3.8	B Group

*15 ms pulse width

Warranty life is 50% of battery capacity.